



10- $\frac{3}{4}$ " 8rd Body  
Carbon Steel  
P/N 9210-0000-030

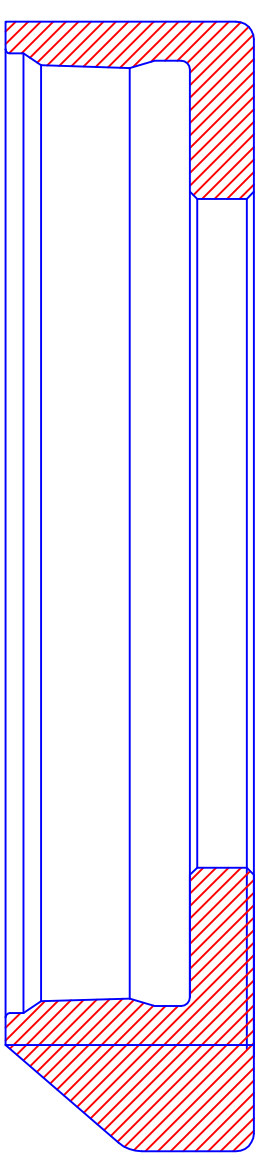

12- $\frac{3}{4}$ " 8V Top Cap  
P/N 9210-0010-016

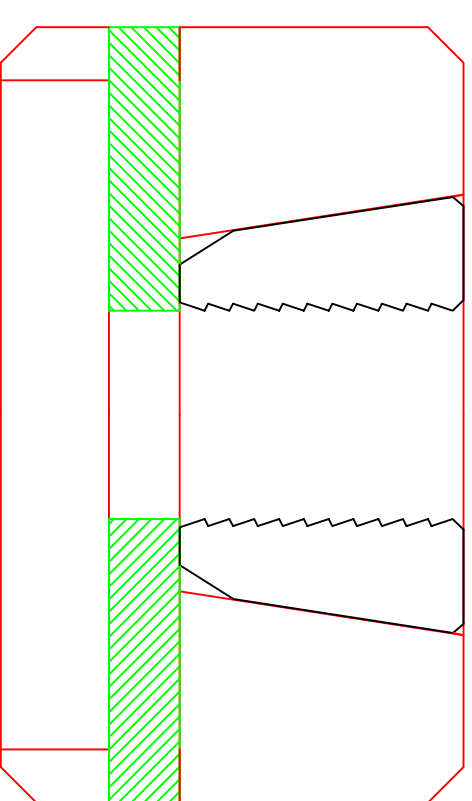

C-22 11" X 4- $\frac{1}{2}$ " Hanger, Load Activated Slip Assembly.  
Max. Load 250,000#  
P/N 9210-0045-022

**ALL THREADS ARE PER API SPECIFICATION 5B**

**Notes:**

1. DEBURR AND REMOVE ALL SHARP EDGES
- .015 X 45° UNLESS OTHERWISE NOTED
2. PART TO BE FREE OF MACHINE OILS AND METAL CHIPS
3. REFERENCE API 5B AND 11-1W

TOLERANCES UNLESS NOTED

DECIMAL	X.X	X.XX	X.XXX	ANGULAR SURFACE
	±.1	±.015	±.005	±.5°
				125 rms



Wellhead Systems Inc.  
710 West McVey  
Hill City, Kansas 67642

Material:  
WCC  
(Per API 11-1W)

10- $\frac{3}{4}$ " 8rd X 4- $\frac{1}{2}$ " Male Fig. 92 Casing Head C-22 Profile. All Dimensions ±.005 Unless Otherwise Stated

4-3-09

P/N 9210-0045-025