

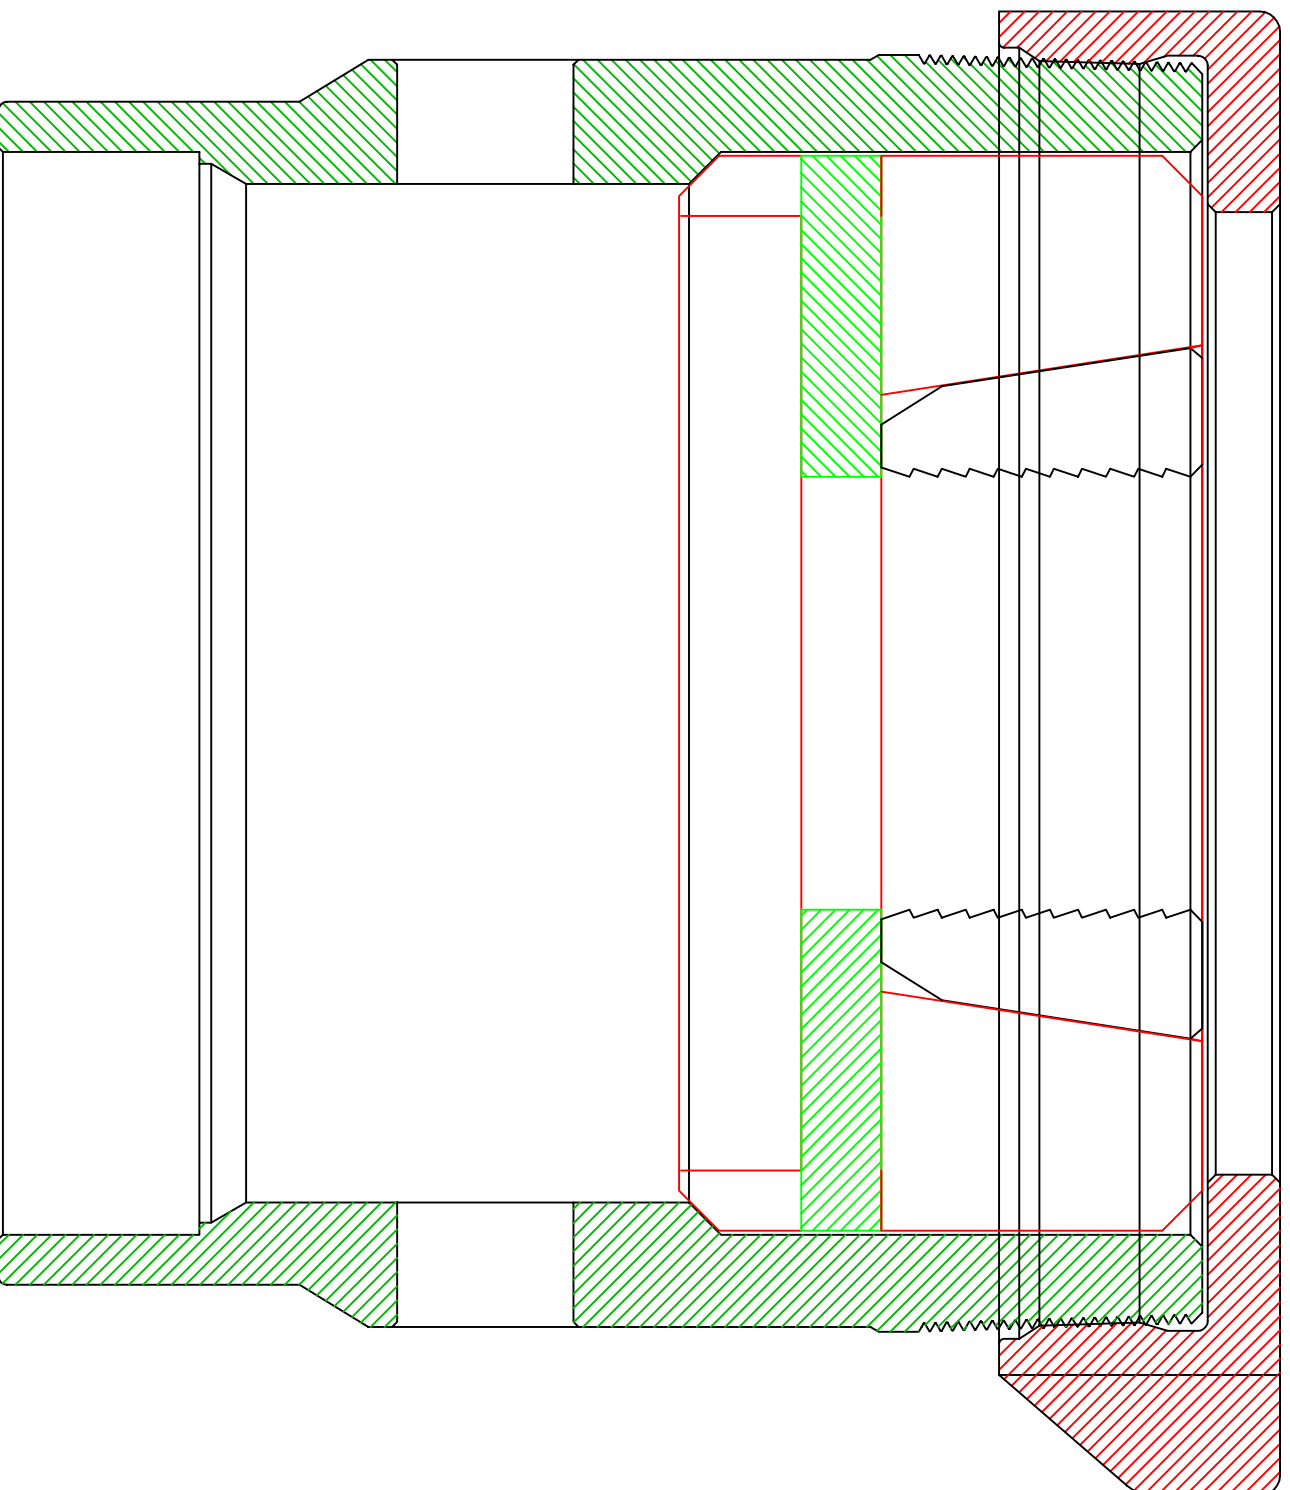


16" 8rd Top Cap
P/N 9210-0013-016

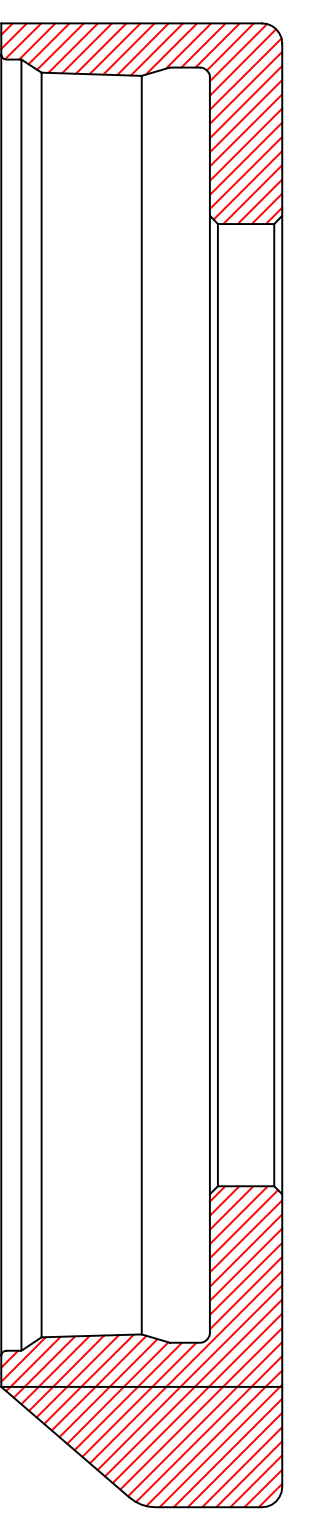

13- $\frac{3}{8}$ SOW Body
Carbon Steel
P/N 9213-0000-031

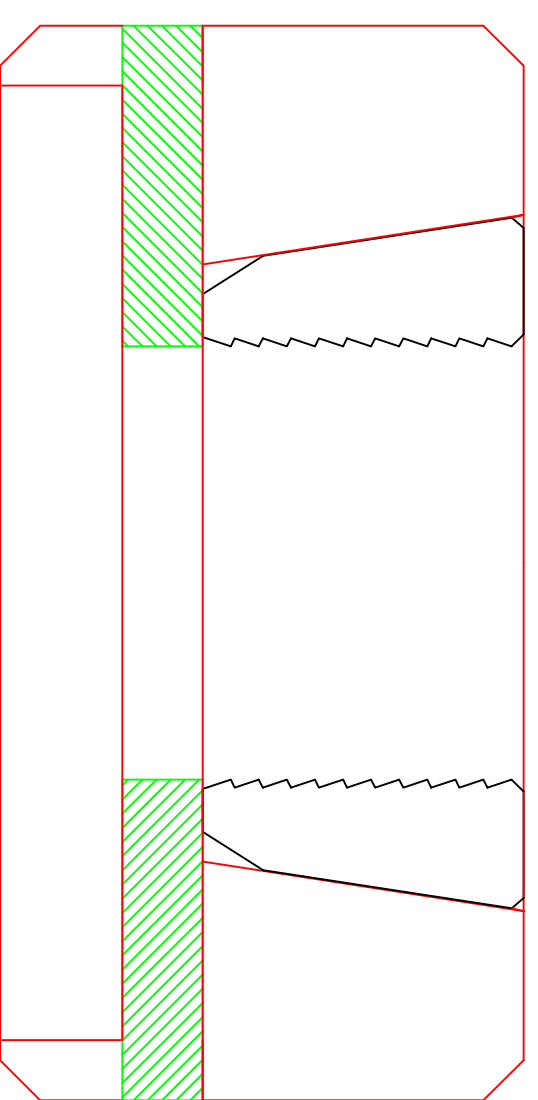

C-22 13- $\frac{3}{8}$ " X 8- $\frac{5}{8}$ " Hanger, Load Activated Slip Assembly.
Max. Load 250,000#
P/N 9213-0858-022

ALL THREADS ARE PER API SPECIFICATION 5B

Notes:

1. DEBURR AND REMOVE ALL SHARP EDGES
.015 X 45° UNLESS OTHERWISE NOTED
2. PART TO BE FREE OF MACHINE OILS AND METAL CHIPS
3. REFERENCE API 5B AND 11-IW

TOLERANCES UNLESS NOTED

DECIMAL	X.X	X.XX	X.XXX	ANGULAR SURFACE
	±.1	±.015	±.005	±.5°
				125 rms



Wellhead Systems Inc.
710 West McVey
Hill City, Kansas 67642

Material:
WCC
(Per API 11-IW)

13- $\frac{3}{8}$ X 8- $\frac{5}{8}$ " SDW Fig. 92
Casing Head C-22 Profile
All Dimensions ±.005 Unless
Otherwise Stated

4-3-09

P/N 9213-0858-001