

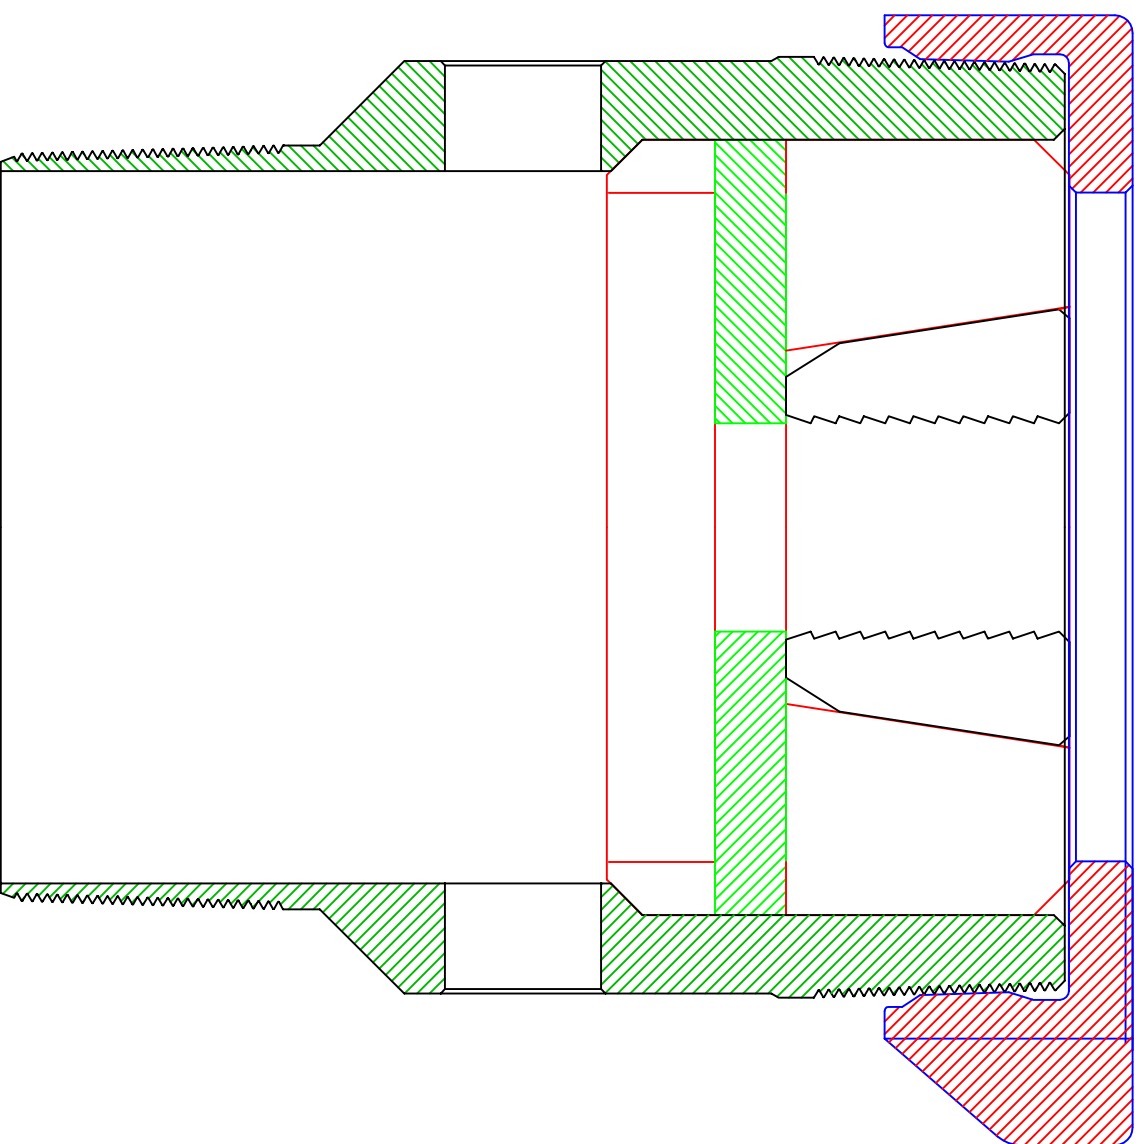


12-<sup>3</sup>/<sub>4</sub>" 8V Top Cap  
P/N 9210-0010-016

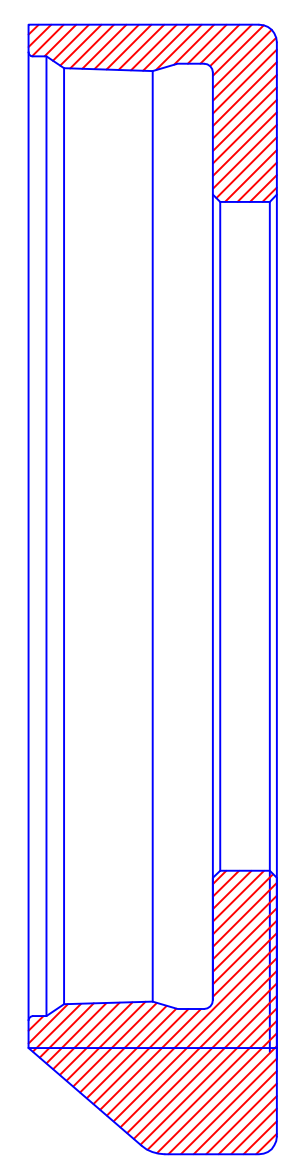

10-<sup>3</sup>/<sub>4</sub>" 8rd Body  
Carbon Steel  
P/N 9210-0000-030

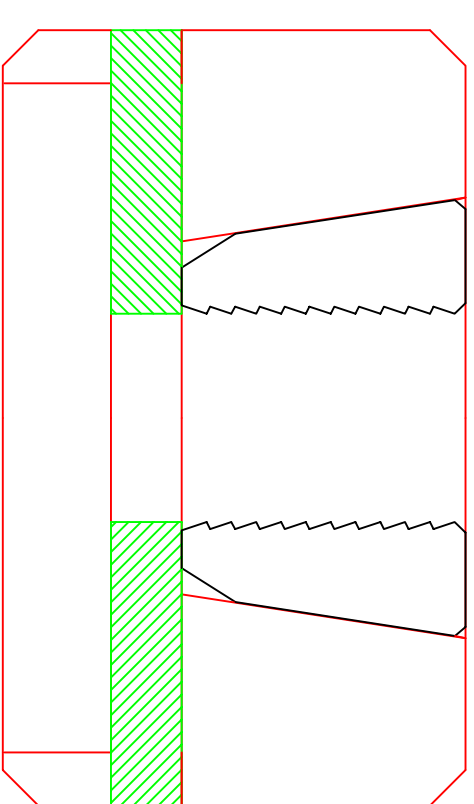

C-22 11" X 7" Hanger, Load Activated Slip Assembly.  
Max. Load 250,000#  
P/N 9210-0070-022

**ALL THREADS ARE PER API SPECIFICATION 5B**

**Notes:**

1. DEBURR AND REMOVE ALL SHARP EDGES  
.015 X 45° UNLESS OTHERWISE NOTED
2. PART TO BE FREE OF MACHINE OILS AND METAL CHIPS
3. REFERENCE API 5B AND 11-IW

TOLERANCES UNLESS NOTED

DECIMAL	X.X	±.1
	X.XX	±.015
	X.XXX	±.005
ANGULAR SURFACE		±.5° 125 rms



Wellhead Systems Inc.  
710 West McVey  
Hill City, Kansas 67642

Material:  
WCC  
(Per API 11-IW)

10-<sup>3</sup>/<sub>4</sub>" 8rd X 7" Male Fig. 92  
Casing Head C-22 Profile,  
All Dimensions ±.005 Unless  
Otherwise Stated

4-3-09

P/N 9210-0070-025