

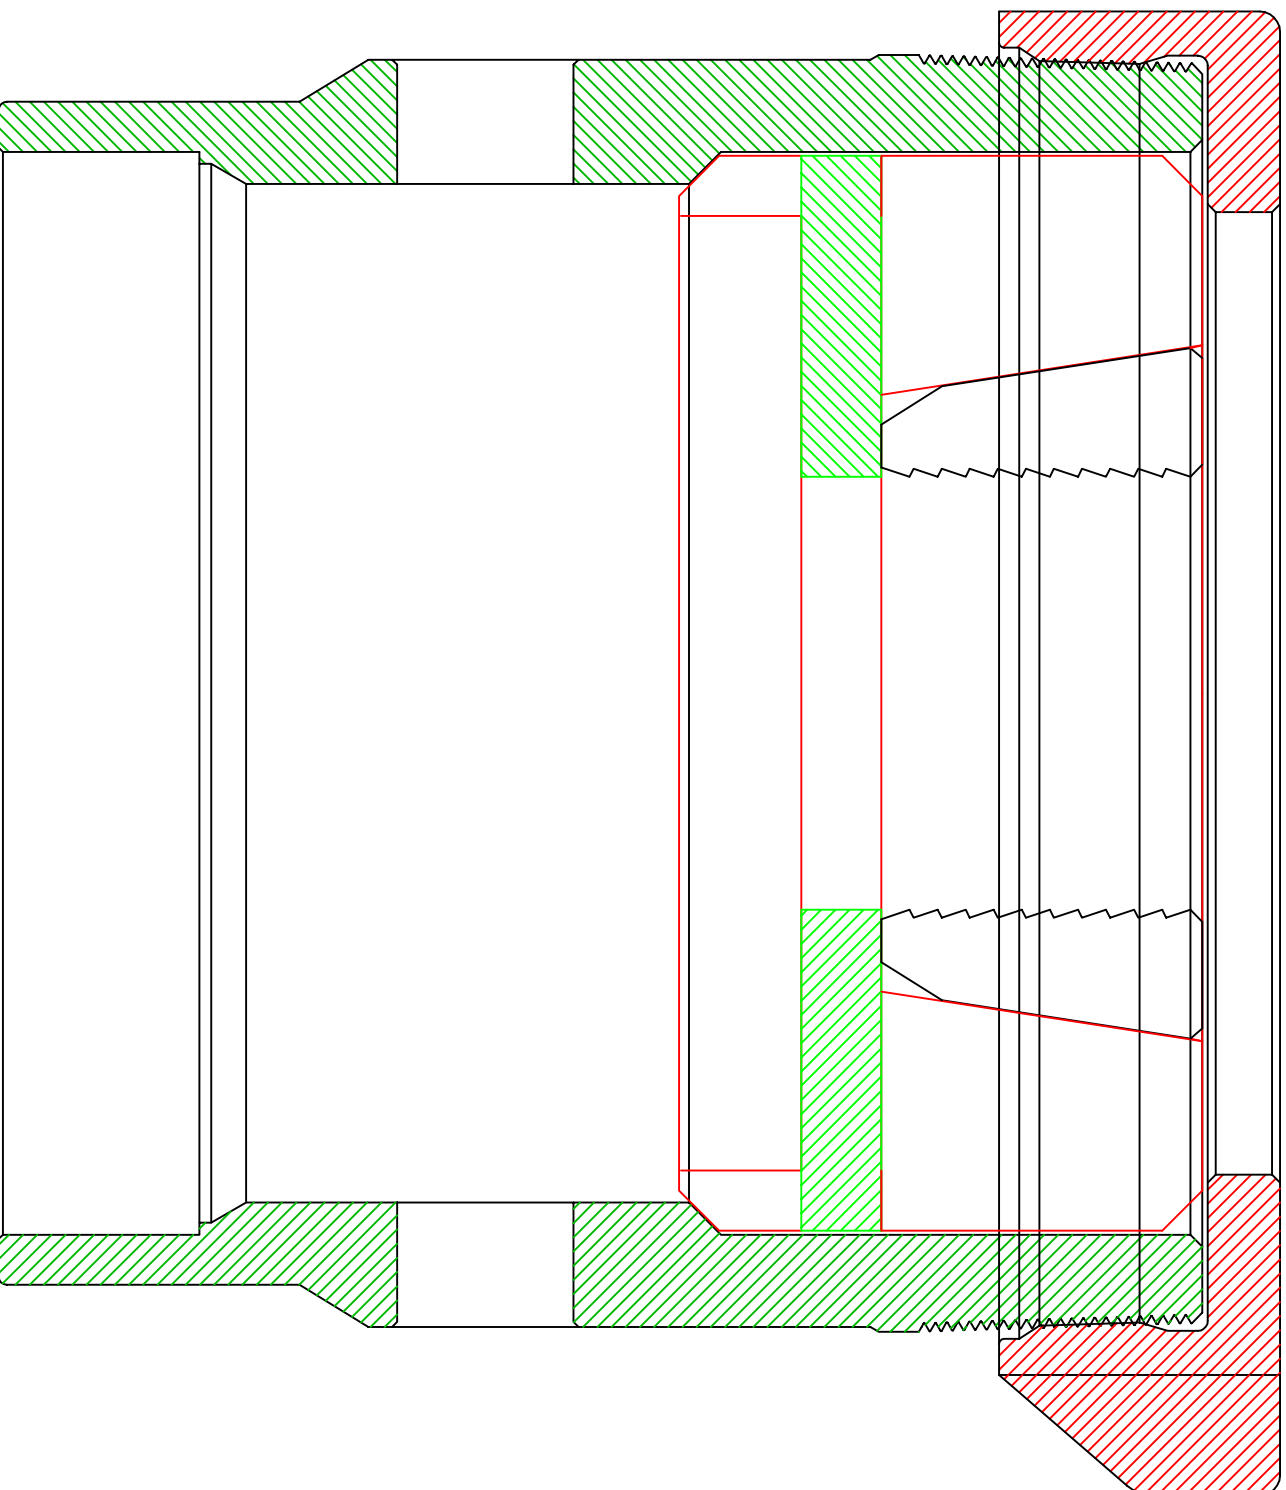


16" 8rd Top Cap  
P/N 9210-0013-016

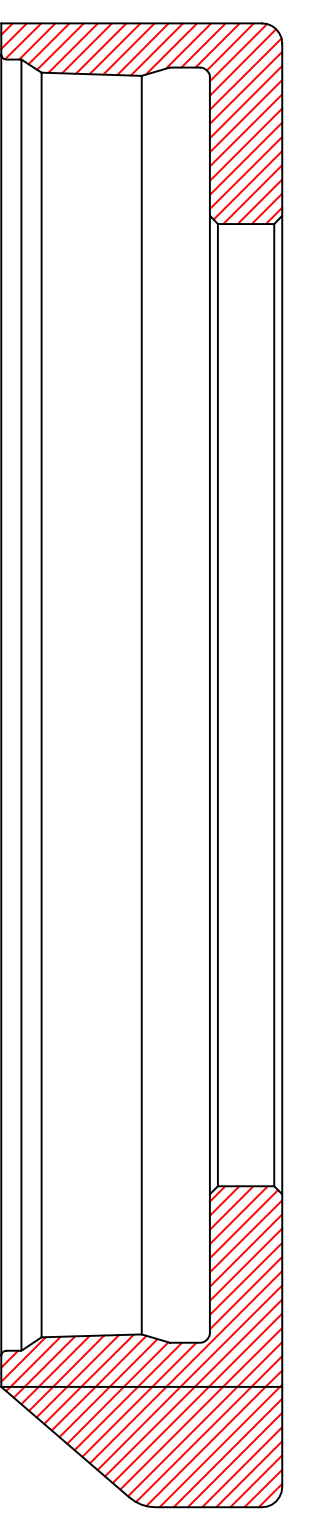

13- $\frac{3}{8}$  SOW Body  
Carbon Steel  
P/N 9213-0000-031

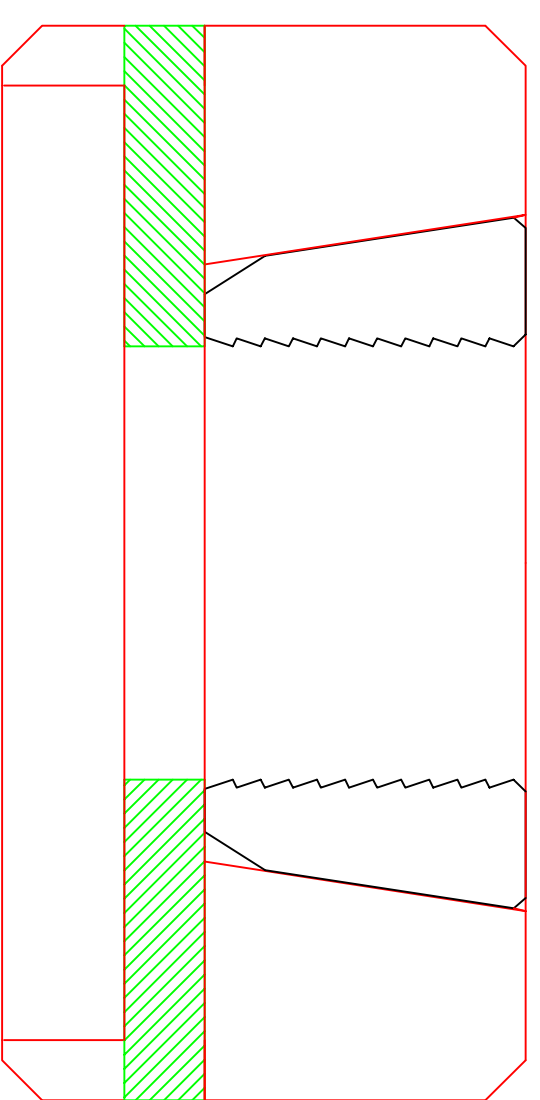

C-22 13- $\frac{3}{8}$  X 5- $\frac{1}{2}$  Hanger, Load Activated Slip Assembly.  
Max. Load 250,000#  
P/N 9213-0055-022

**ALL THREADS ARE PER API SPECIFICATION 5B**

**Notes:**

1. DEBURR AND REMOVE ALL SHARP EDGES  
.015 X 45° UNLESS OTHERWISE NOTED
2. PART TO BE FREE OF MACHINE OILS AND METAL CHIPS
3. REFERENCE API 5B AND 11-IW

TOLERANCES UNLESS NOTED

DECIMAL	X.X	X.XX	X.XXX	ANGULAR SURFACE
	±.1	±.015	±.005	±.5°
				125 rms



Wellhead Systems Inc.  
710 West McVey  
Hill City, Kansas 67642

Material:  
WCC  
(Per API 11-IW)

13- $\frac{3}{8}$  X 5- $\frac{1}{2}$  SDW Fig. 92  
Casing Head C-22 Profile  
All Dimensions ±.005 Unless  
Otherwise Stated

4-3-09

P/N 9213-0055-001