




4 1/2 8RD FEMALE BODY
 CARBON STEEL
 P/N 5804-0000-030

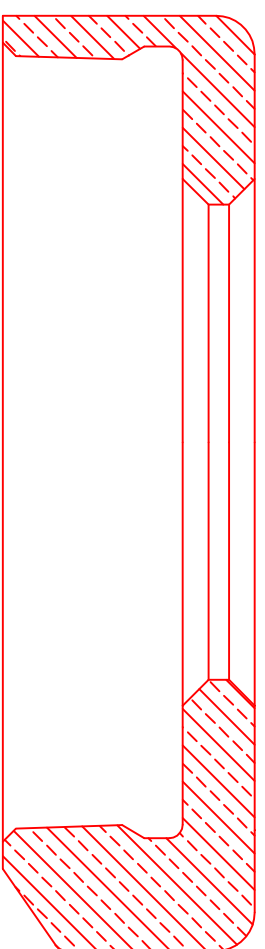

TOP CAP
 P/N 5810-0000-116




TOP PLATE
 P/N 5820-0238-004




PACKOFF RUBBER
 P/N 5820-0238-003



BOTTOM PLATE
 P/N 5820-0238-002

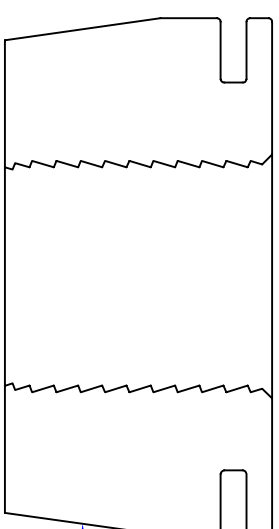

CASE HARDENED SLIPS
 P/N 5820-0238-001

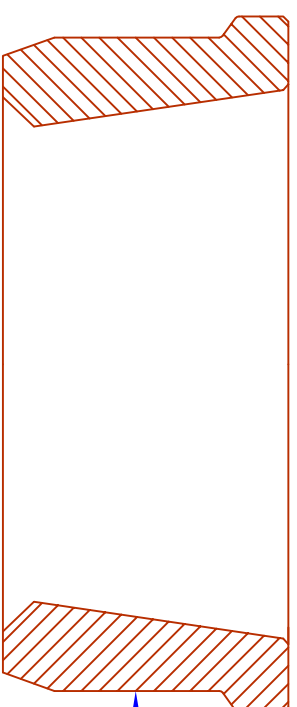

SLIP BOWL
 P/N 5801-0000-116

- Notes:
1. DEBURR AND REMOVE ALL SHARP EDGES
 .015 X 45° UNLESS OTHERWISE NOTED
 2. PART TO BE FREE OF MACHINE OILS AND METAL CHIPS
 3. REFERENCE API 5B AND 11-IW

TOLERANCES UNLESS NOTED

DECIMAL	X.X	X.XX	X.XXX	ANGULAR SURFACE
	±.1	±.015	±.005	±.5°
				125 rms



Wellhead Systems Inc.
 710 West McVey
 Hill City, Kansas 67642

Wellhead Systems Inc.
 710 West McVey
 Hill City, Kansas 67642

Material: Ductile Iron 65-45-12 (Per API 11-IW)

4 1/2 8rd X 2-3/8 Female Type "K" Tubing Head
 All Dimensions ±.005 Unless Otherwise Stated

P/N 5804-0238-001