


5- $\frac{1}{2}$ 8RD FEMALE BODY
CARBON STEEL
P/N 5805-0000-030

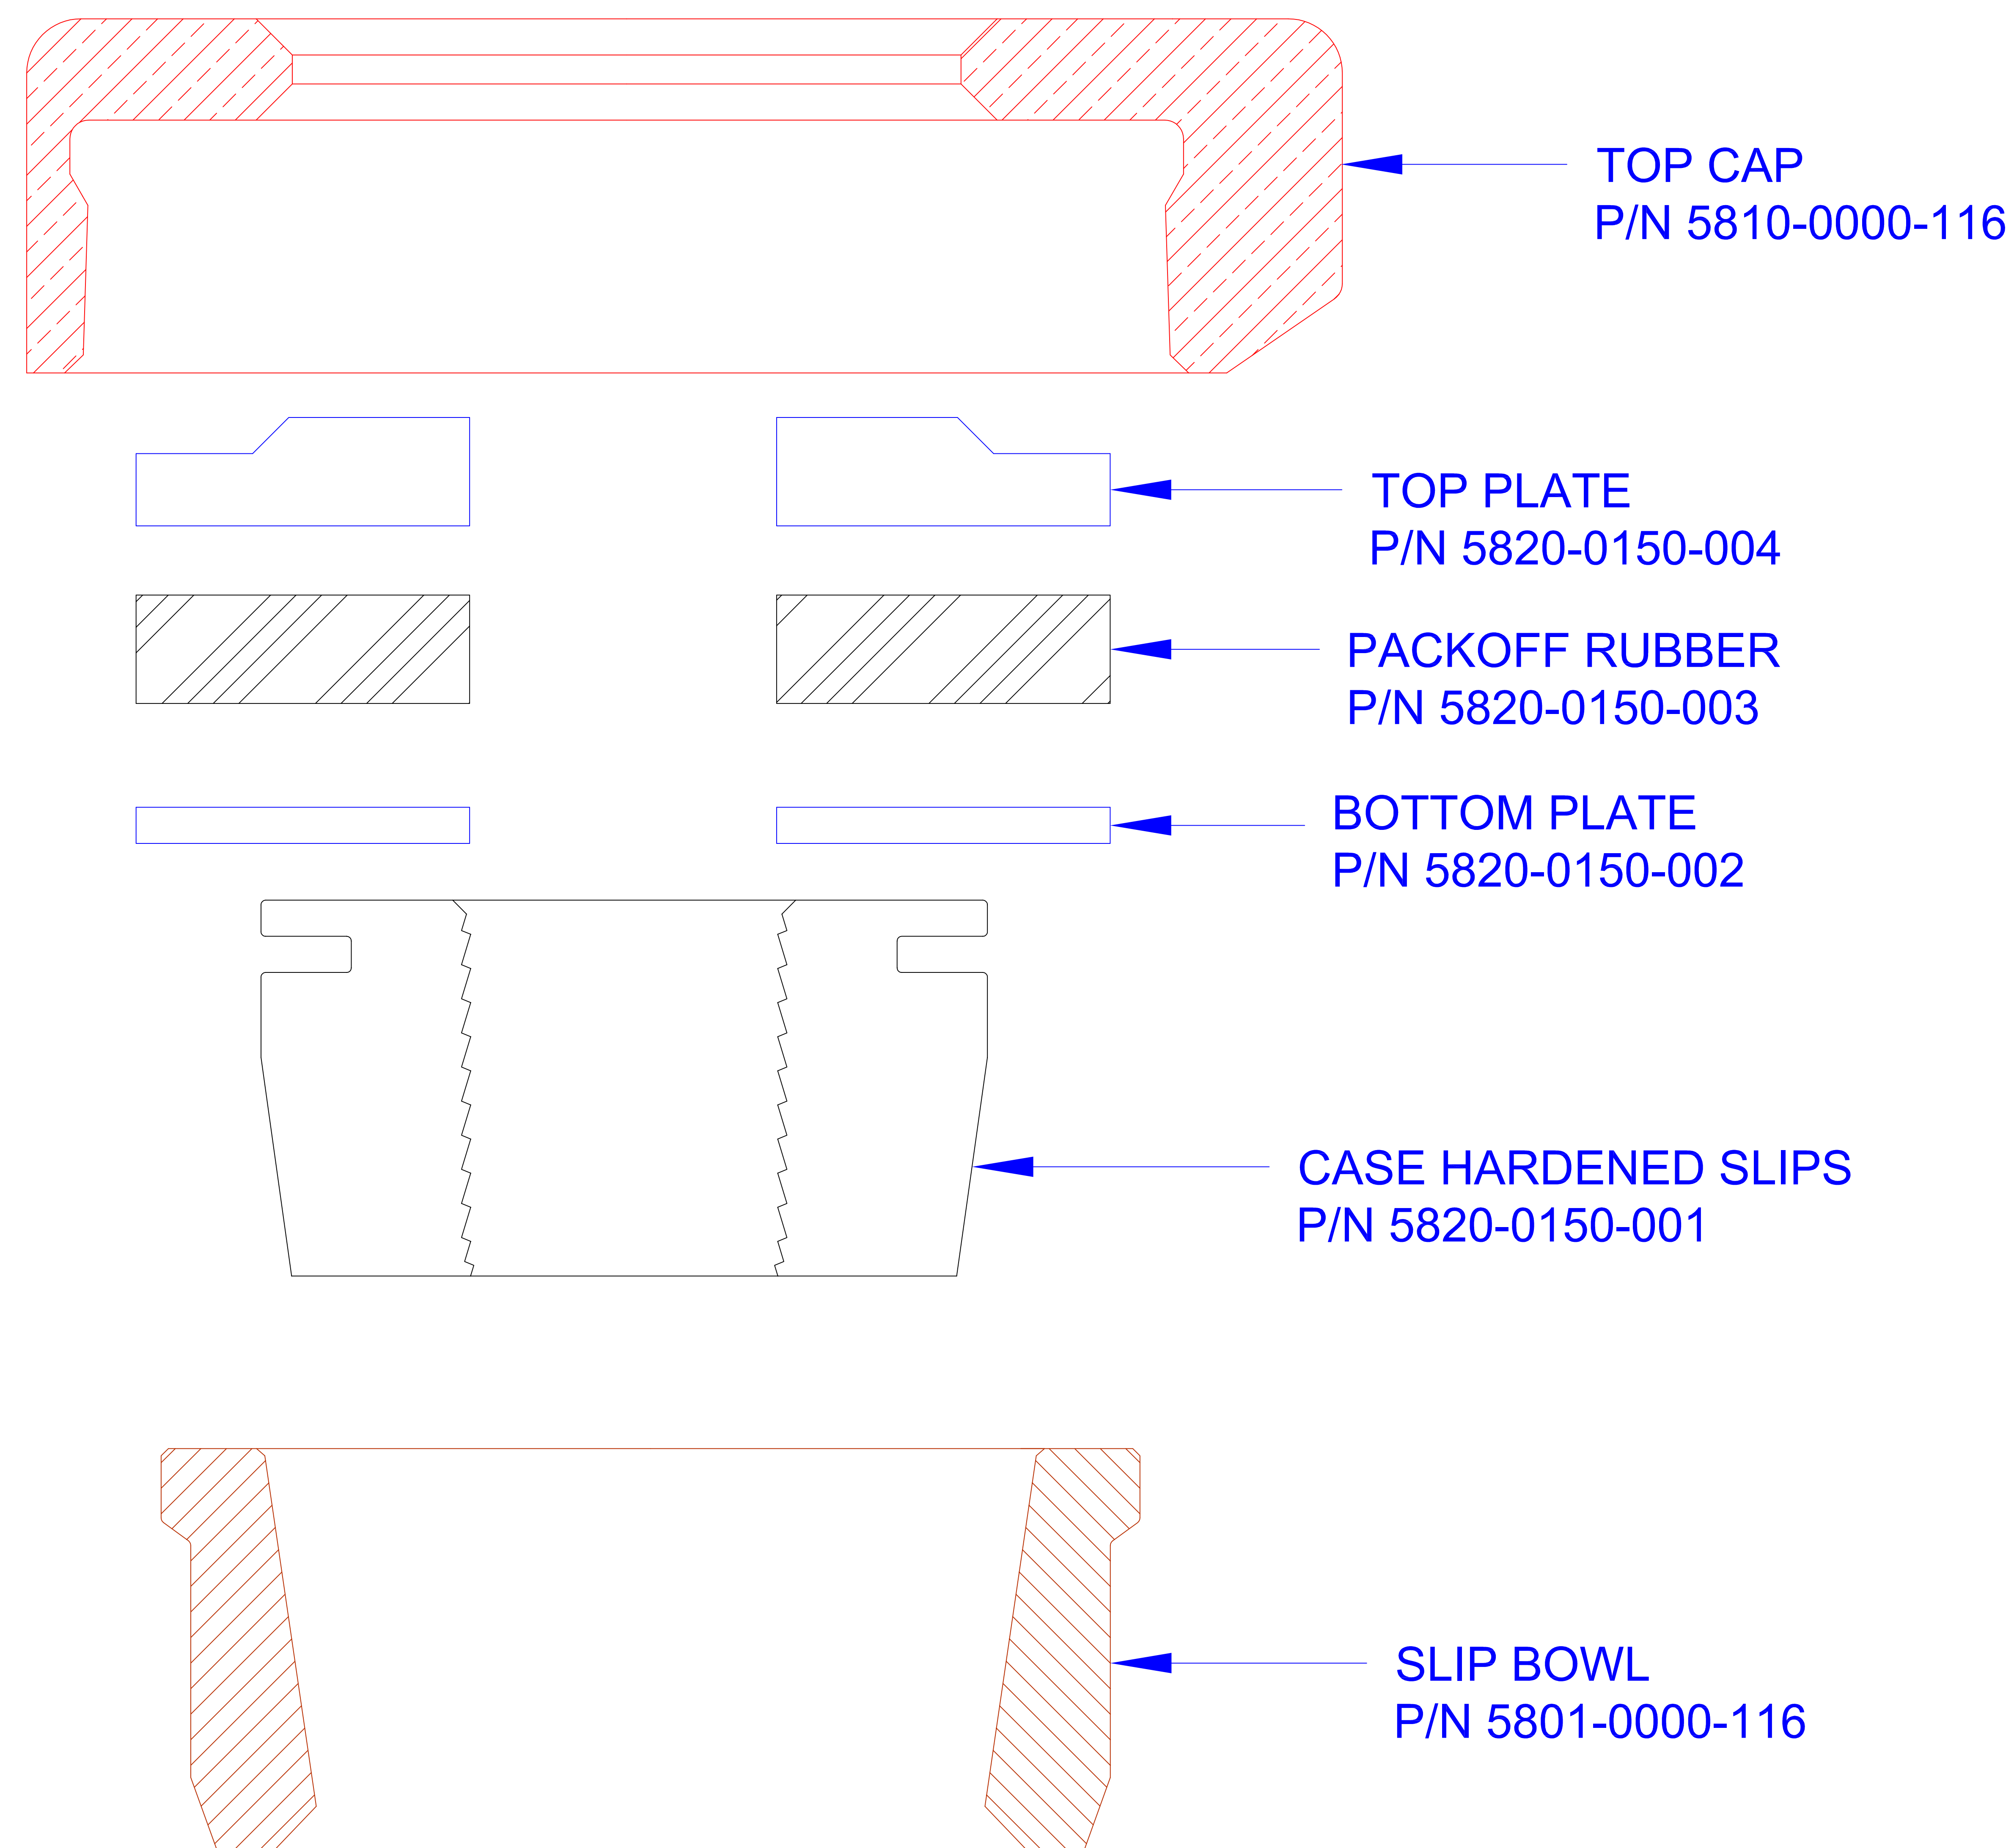

TOP CAP
P/N 5810-0000-116

TOP PLATE
P/N 5820-0150-004

PACKOFF RUBBER
P/N 5820-0150-003

BOTTOM PLATE
P/N 5820-0150-002

CASE HARDENED SLIPS
P/N 5820-0150-001

SLIP BOWL
P/N 5801-0000-116

Notes:

1. DEBURR AND REMOVE ALL SHARP EDGES
.015 X 45° UNLESS OTHERWISE NOTED
2. PART TO BE FREE OF MACHINE OILS AND METAL CHIPS
3. REFERENCE API 5B AND 11-IW

TOLERANCES UNLESS NOTED

DECIMAL	X.X	±.1
	X.XX	±.015
	X.XXX	±.005
	ANGULAR	±.5°
	SURFACE	125 rms



Material: Ductile
Iron 65-45-12
(Per API 11-IW)

Wellhead Systems Inc.
710 West McVey
Hill City, Kansas 67642

5- $\frac{1}{2}$ 8rd X 1- $\frac{1}{2}$ Female Type
"K" Tubing Head
All Dimensions ±.005 Unless
Otherwise Stated

P/N 5805-0150-001